


Junction box for mini bullet and dome cameras.

DWC-DAJUNC



WHAT'S IN THE BOX

Quick Setup Guide		1	Mounting Template		1
Screws and Plastic Anchors		4	Star Wrench (T-20)		1
Camera Mounting Screws A Ø89 (M3x10mm)		2	Camera Mounting Screws B Ø58 (M3x16mm)		3
Camera Mounting Screws B Ø89 (M3x8mm)		2			

NOTE: Download all your support materials and tools in one place.


1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the 'Search by Product' search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click 'Search'. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.



INSTALLATION

- 1 Separate the mounting plate from the junction base using the star wrench included.
- 2 Using the mounting template or junction box itself, mark and drill the necessary holes on the mounting surface.
- 3 Secure the junction box to the mounting surface using the screws and anchors included.
- 4 Pass wires through the junction box base and then through the mounting plate. Make all necessary connections. Use the waterproof cap and gasket with the network cable to reduce the risk of water leaks.
- 5 Secure the camera to the mounting plate using the included screws. The junction box has three (3) camera mounting screw sets and two (2) mounting options. See the table below to determine the corresponding screw set and mounting hole set for compatible cameras.

Screw size	Compatible camera	Installation Option
10mm screws 	DWC-XSDA models	2x Mounting holes at Ø89 radius (See Diagram)
16mm screws   	DWC-XSBE models	3x Mounting holes at Ø58 radius (See Diagram)
8mm screws  	DWC-MV7 and DWC-V7 models	2x Mounting holes at Ø89 radius (See Diagram)

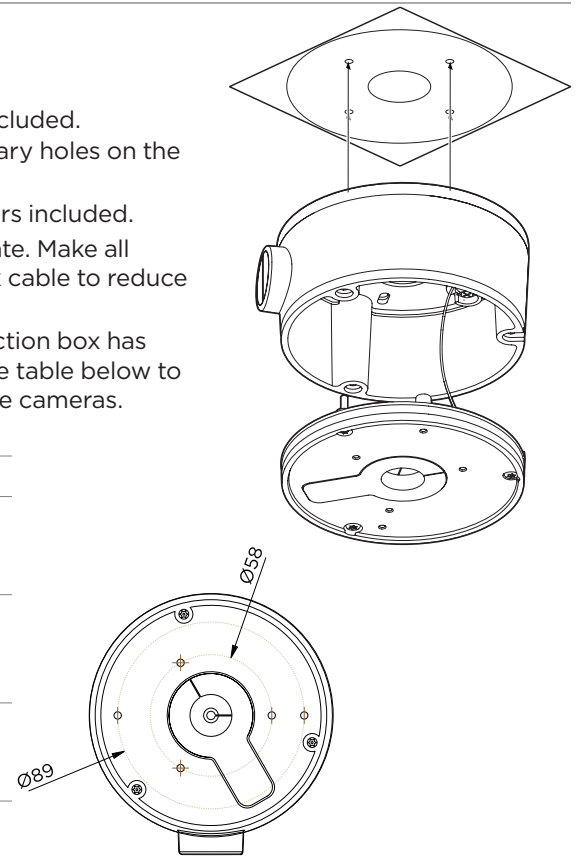

- 6 Adjust the camera's lens position and angle and place the cover dome on the camera base to complete the installation.

