




Junction box for multi-sensor vandal dome cameras

DWC-MDSJUNC



WHAT'S IN THE BOX

Camera Mounting Screws		2	Mounting Template		1
Screws and Plastic Anchors		4	Quick Setup Guide		1
Gang Plate Mounting Screws, Type A Installation		4	Safety Wire		1
Gang Plate Mounting Screws, Type B Installation		2			


NOTE: Download all your support materials and tools in one place.

1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the **'Search by Product'** search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click **'Search'**. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.



INSTALLATION


- 1 Using the mounting template or the junction box itself, mark and drill the necessary holes on the mounting surface.
- 2 Secure the junction box to the mounting surface using the screws and anchors included.
- 3 Affix the safety wire at the bottom of the mounting bracket's base. Connect the other side of the safety wire to the base of the camera.
- 4 To mount the camera to the mounting accessory, remove the dome from the camera base using the wrench included with the camera.

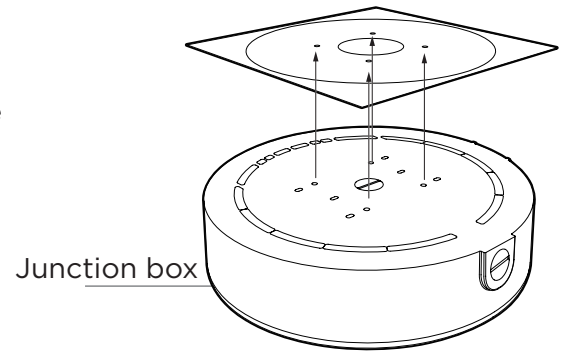


Junction box

NOTE: Do not touch the lenses when handling the camera modules.

- 5 Pass wires through and make all necessary connections.
- 6 Secure the camera to the mounting bracket using the included screws. Align the indented lines on the side of the camera with the lines on the mounting bracket as seen in the image below. Rotate the camera clockwise to lock it into position.



- 7 Adjust the camera modules' position and angle and complete the installation by placing the dome cover on the camera. Secure the dome cover to the camera base using the screws included with the camera. See the camera's QSG for more information.

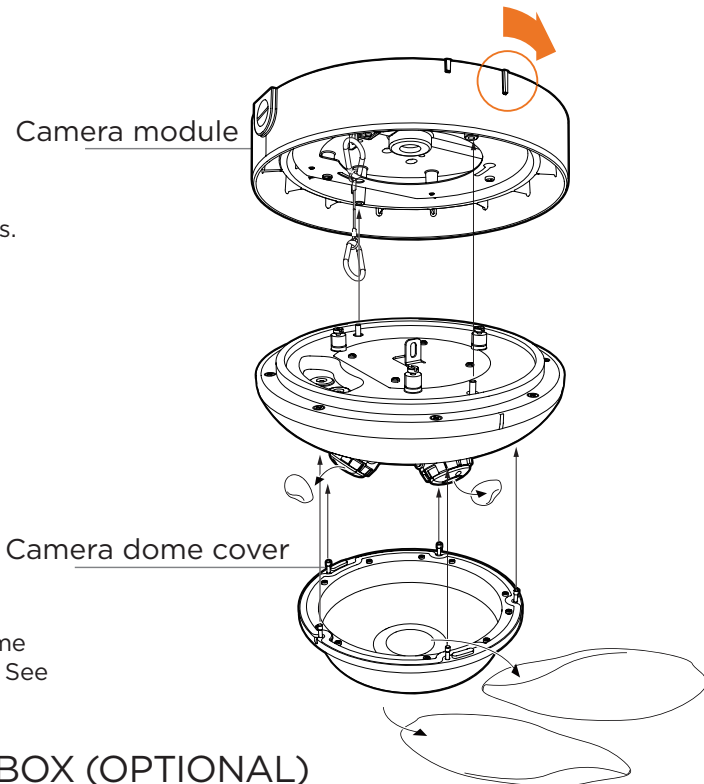


Camera module


Camera dome cover

INSTALLATION WITH GANG BOX OR HANDY BOX (OPTIONAL)

Type A: Handy boxes

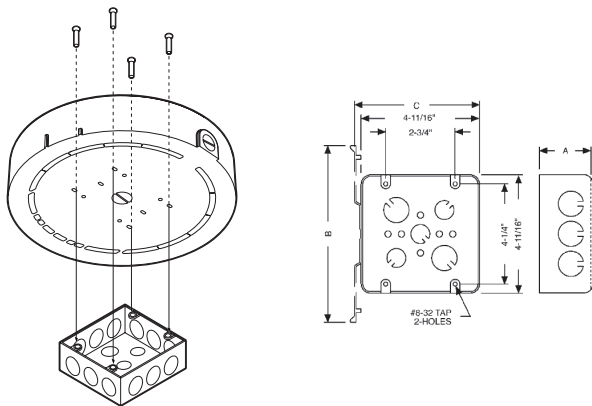

Type B: 2-gang handy box/switch box

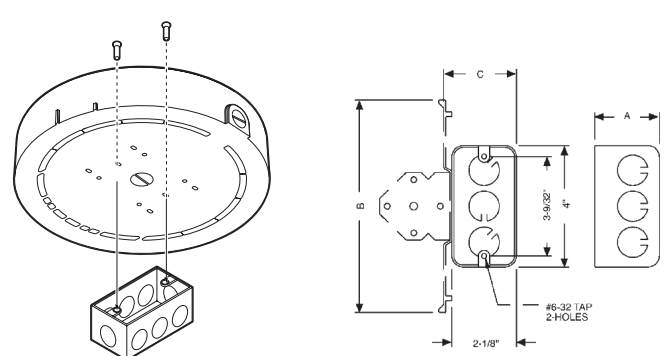

NOTE: When mounting the junction box to a gang box using installation option B, use the wall anchors and screws to secure the junction box and gang box to the mounting surface.