

5MP models	2.1MP/1080p models
DWC-MV75Wi28TW	DWC-MV72Wi28ATW
DWC-MV75Wi4TW	DWC-MV72Wi4ATW
DWC-MV75Wi6TW	DWC-MV72Wi28TW
	DWC-MV72Wi4TW
	DWC-MV72Wi6TW
	DWC-MV72Di4TW
	DWC-MV72Di28TW



NOTE: Download all your support materials and tools in one place.




NOTE: Please see the full product manual for web viewer setup, functions and camera settings options.


NOTE: This products is covered by one or more claims of the HEVC Patents listed at patentlist.accessadvance.com.




BOX CONTENT

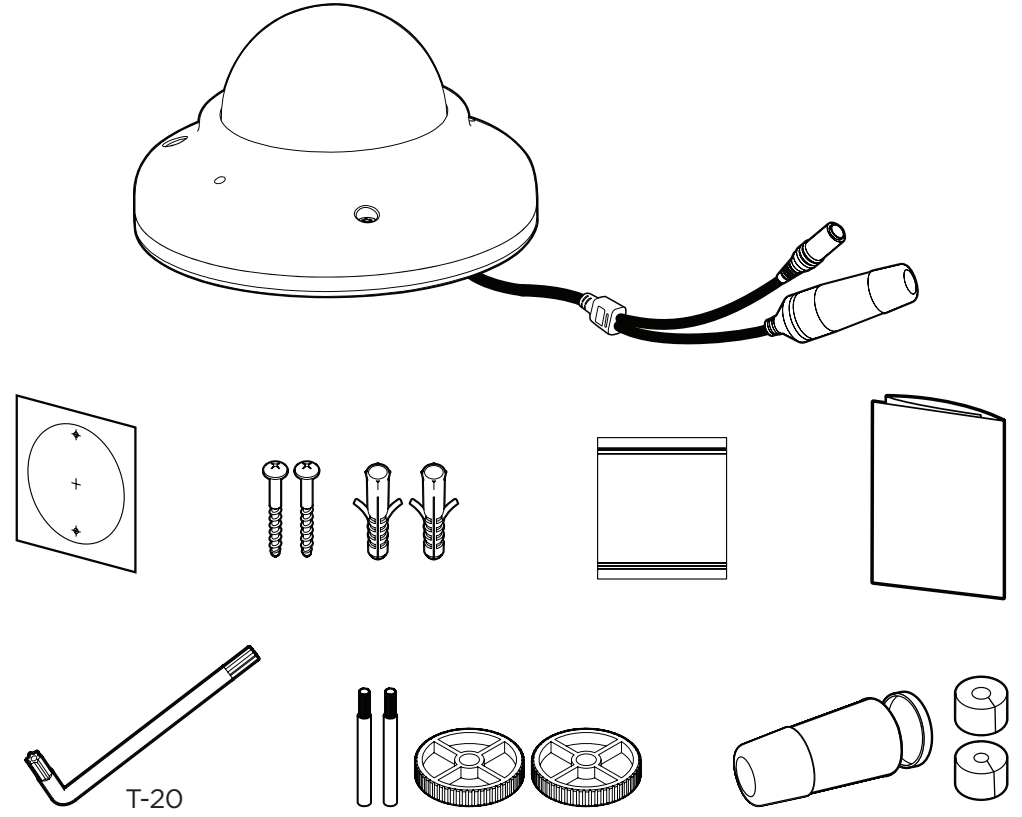

- 1 Remove dome cover for the installation process.

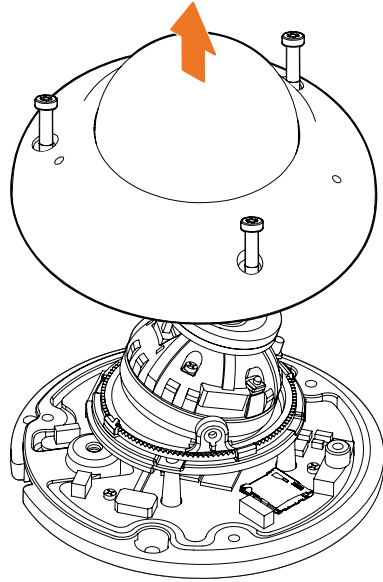


- 2 Replace the moisture absorber in the camera's control panel.

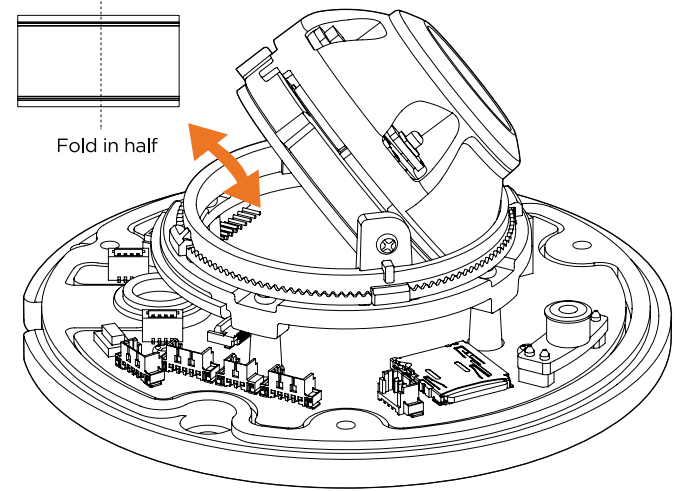


- 3 Secure the camera to the mounting surface.


OPTION A

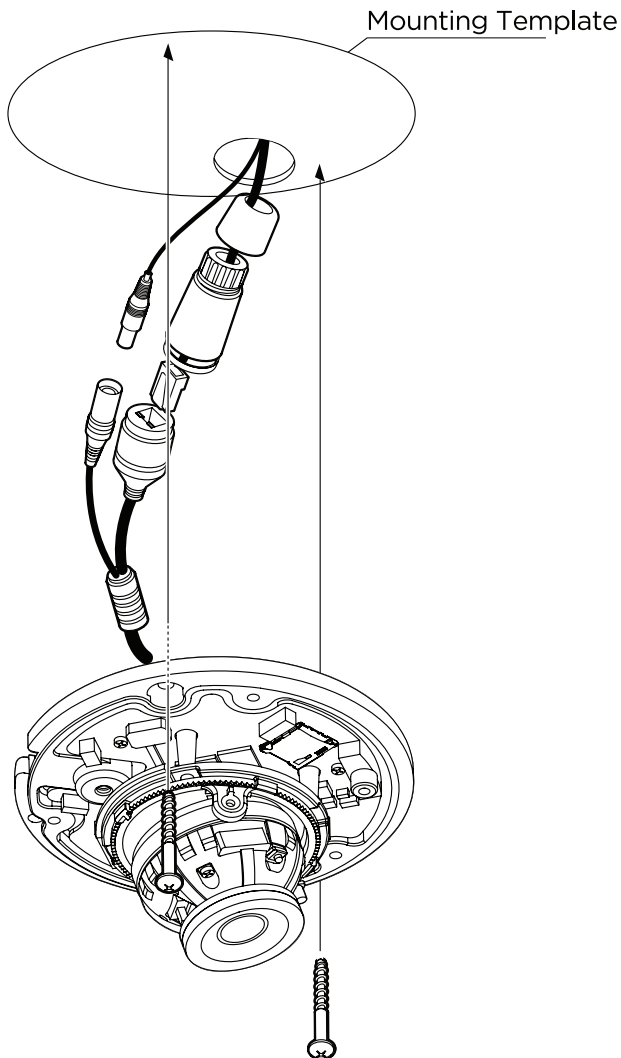

OPTION B

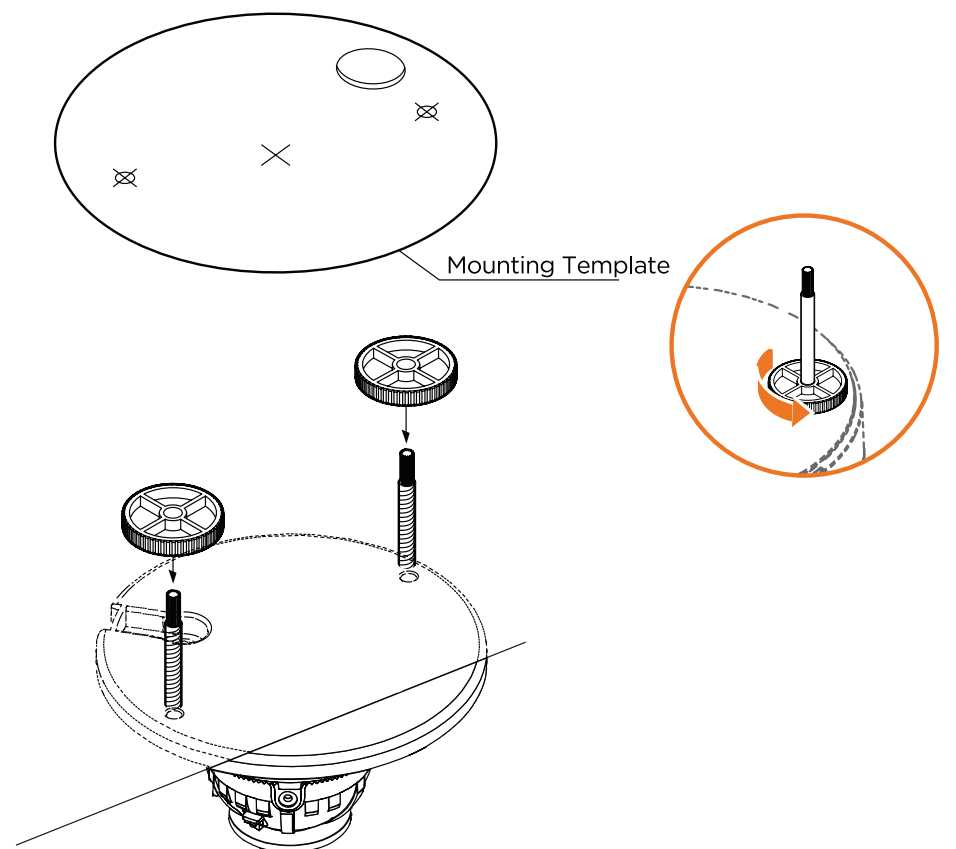


4 Pass wires through and secure the camera to the mounting surface.

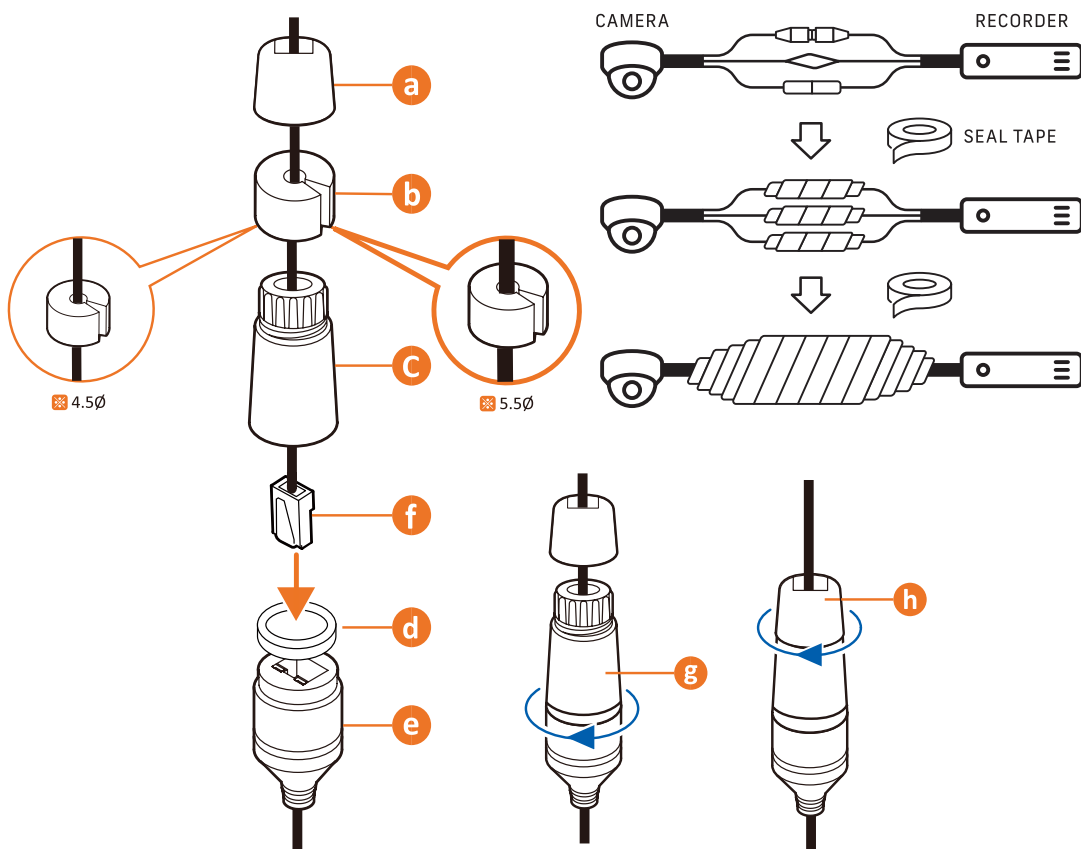


NOTE: Cables with $\varnothing 4.5\text{mm}$ to $\varnothing 5.5\text{mm}$ thickness should use the black rubber ring. Cables over $\varnothing 5.5\text{mm}$ in thickness should use the white rubber ring.

NOTE: To ensure moisture seal, make sure the o-ring **d** is in place between **c** and **e**. In extreme environments use of an outdoor rated sealer is recommended.


5 Micro SD card (optional).

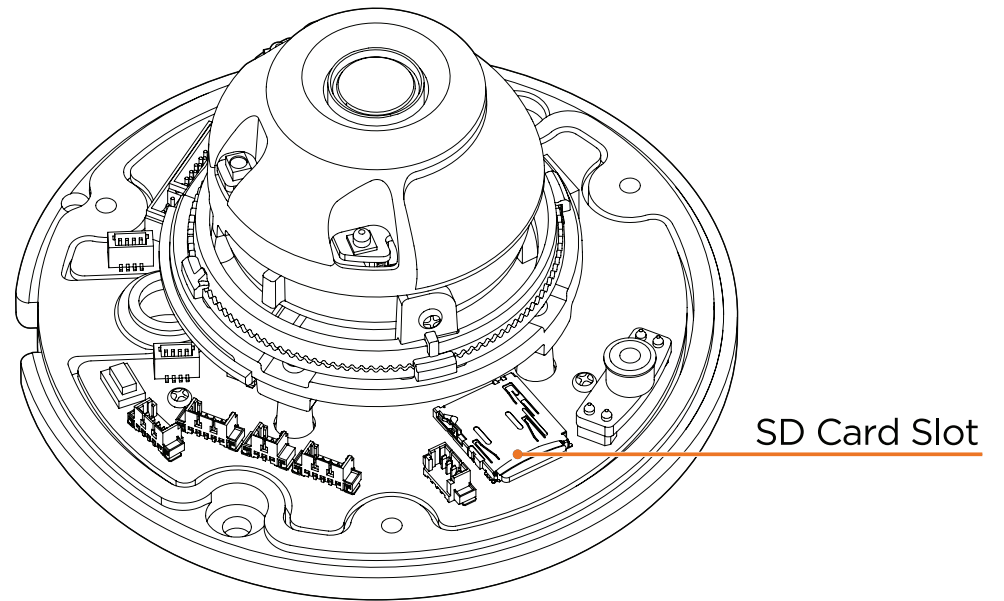

6 Secure the camera base to the mounting accessory.

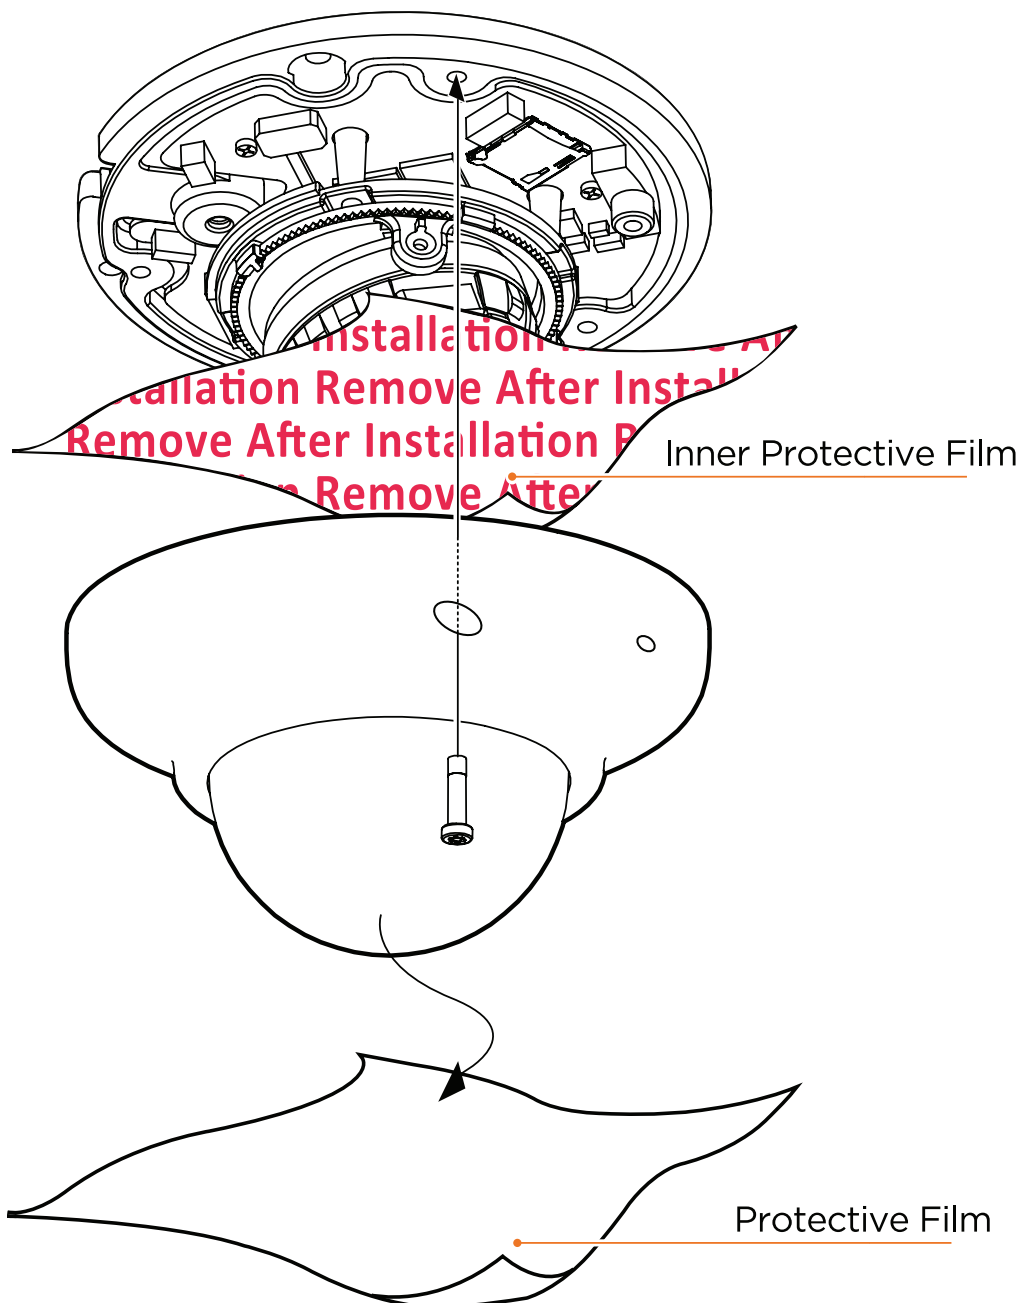

7 Loosen the neck screw and adjust the pan, tilt and rotation. Complete the installation.

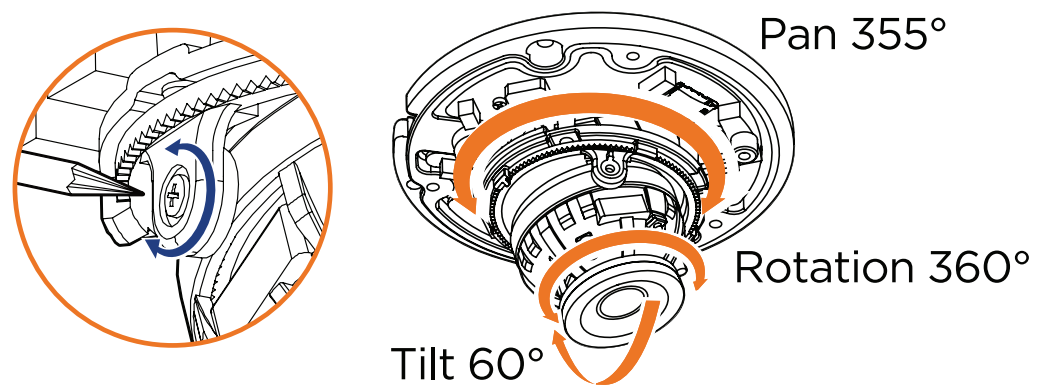

Download quick setup guide, manual, IP Finder and firmware here:

