

DWC-XSBA08MiC1	DWC-XSBA05LiPC1
DWC-XSBA08MiC5	DWC-XSBA05LiPC5
DWC-XSBA08MiC2	DWC-XSBA05LiPC2

BOX CONTENT




NOTE: Download all your support materials and tools in one place.



NOTE: Please refer to the full product manual for instructions on setting up the web viewer, its functions, and camera settings options.


NOTE: This product is covered by one or more claims of the HEVC Patents listed at patentlist.accessadvance.com.

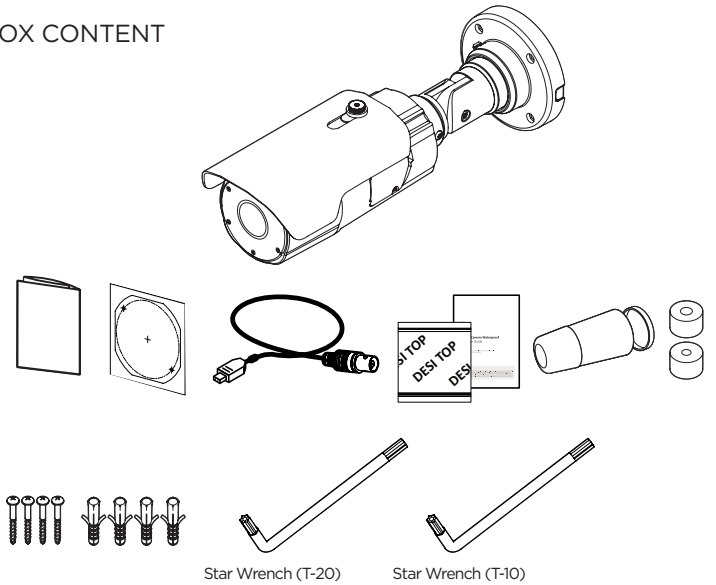


Star Wrench (T-20)

Star Wrench (T-10)


- 1 Mark and drill mounting holes in the mounting surface.

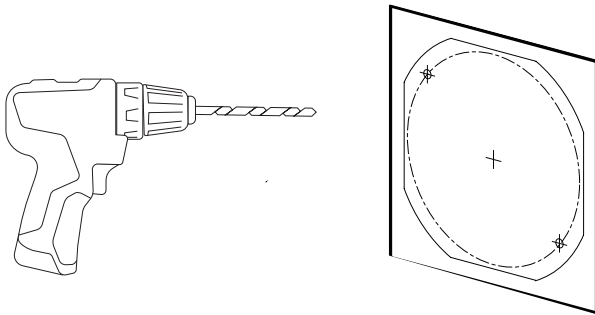

- 2 Replace the moisture absorber.

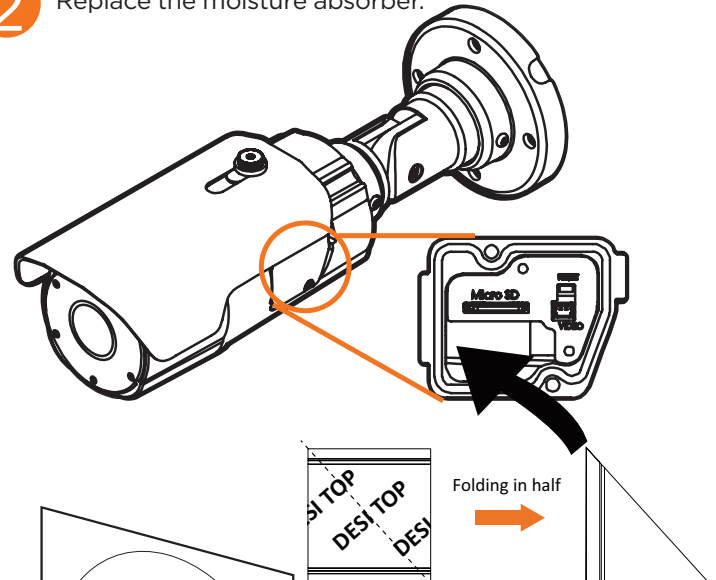


- 3 Pass wires through and secure the camera to the mounting surface. Use the rubber plug as a cable guide for direct surface installation.

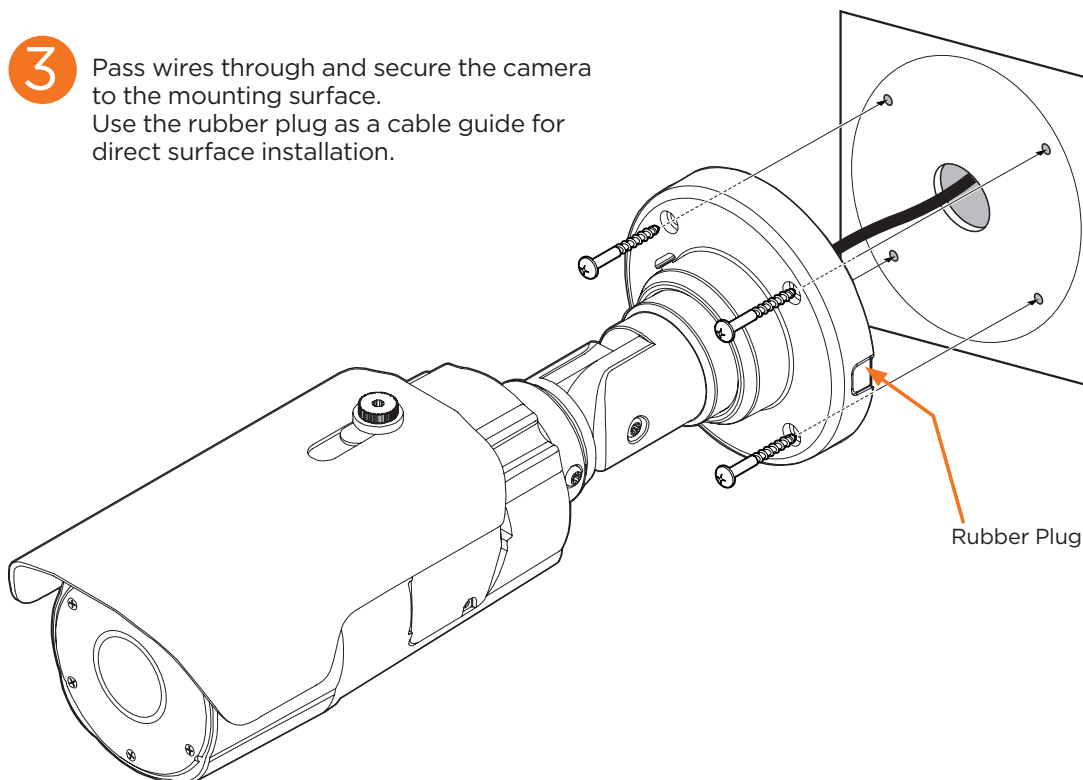


Rubber Plug

RECOMMENDED:

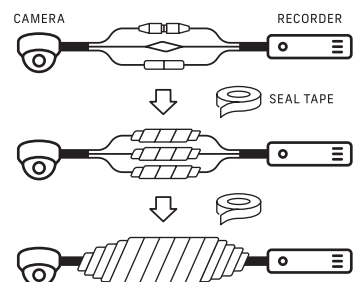


4 Use the waterproof cap for the network cable.

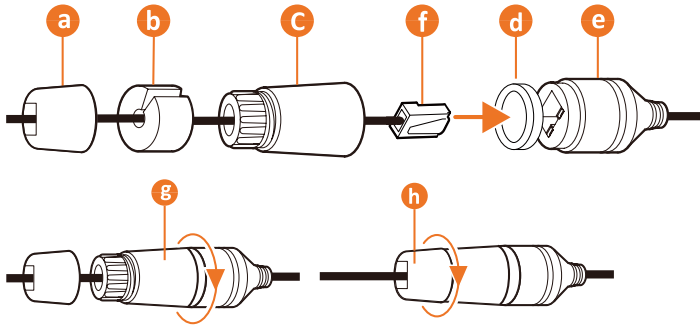


NOTE: Cables with $\varnothing 4.5\text{mm}$ to $\varnothing 5.5\text{mm}$ thickness should use the black rubber ring. Cables over $\varnothing 5.5\text{mm}$ in thickness should use the white rubber ring.

NOTE: To ensure moisture seal, make sure the o-ring **d** is in place between **c** and **e**. In extreme environments use of an outdoor rated sealer is recommended.


5 Adjust the camera's tilt, pan and rotation.

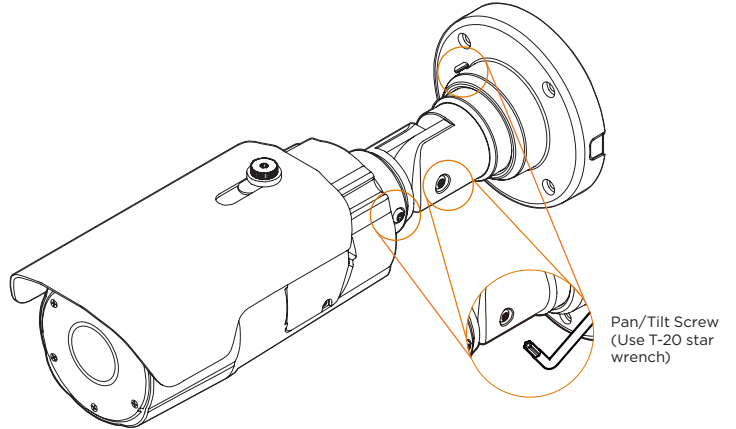

6 Cables and external devices.

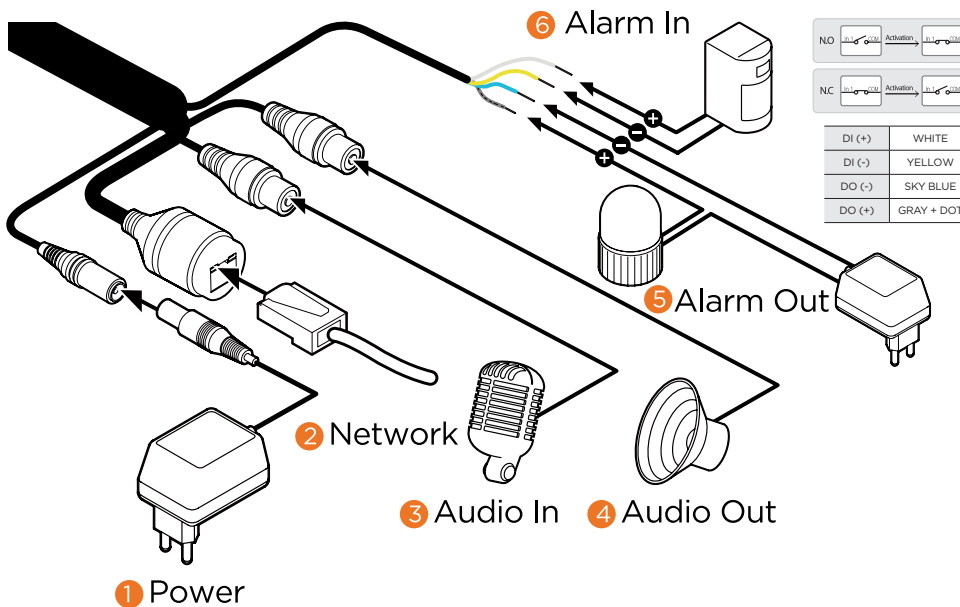

7 Remove the protective films and complete the installation.

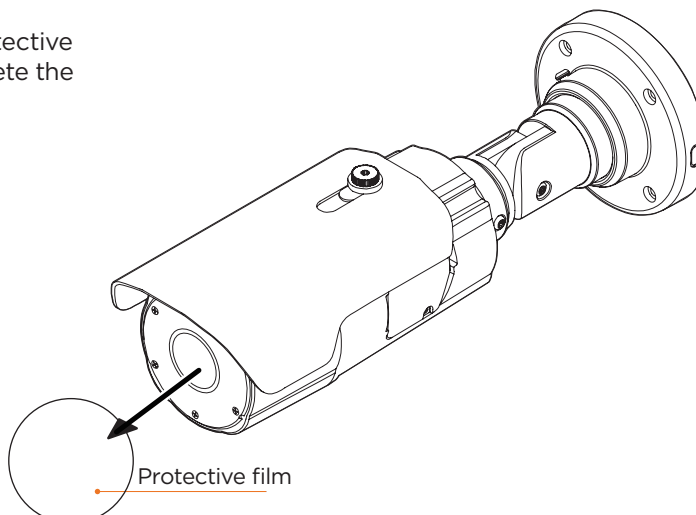

Download quick setup guide, manual, IP Finder and firmware here:

