

DWC-XSTD05MFC1
DWC-XSTD05MFC5
DWC-XSTD05MFC2



NOTE: Download all your support materials and tools in one place.





NOTE: Please refer to the full product manual for instructions on setting up the web viewer, its functions, and camera settings options.


NOTE: This product is covered by one or more claims of the HEVC Patents listed at patentlist.accessadvance.com.



BOX CONTENT




Hex 2.0




T10




2x (4.0mm x 35mm)




Recommended






- 1 Replace the moisture absorber in the camera's control panel.

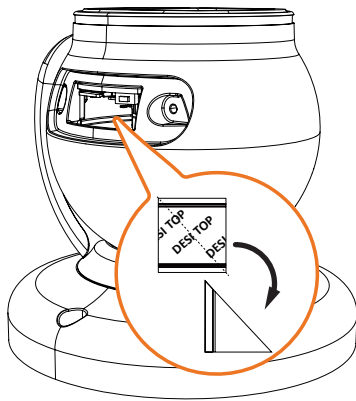

- 3 Pass wires through and secure the camera to the mounting surface. Use the cable guide for direct surface installation.

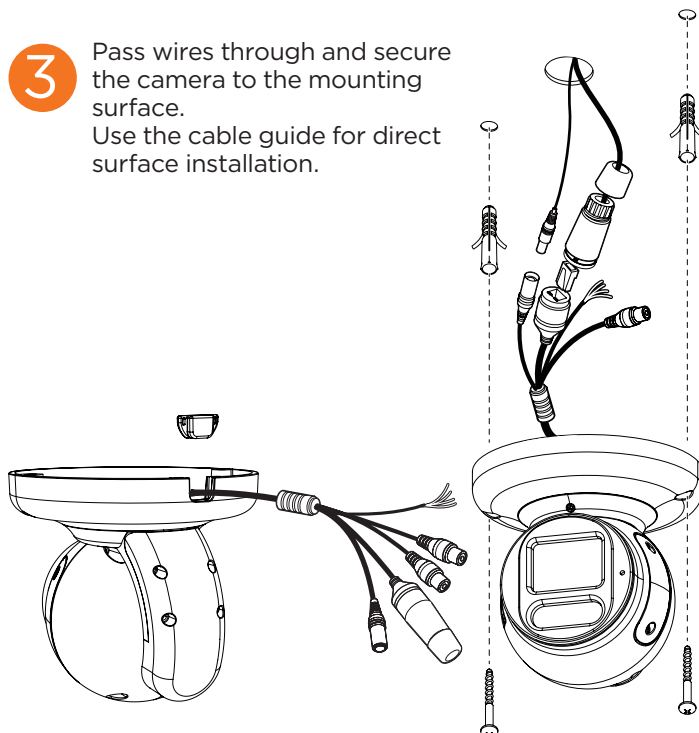


- 2 Mark and drill mounting holes in the mounting surface.

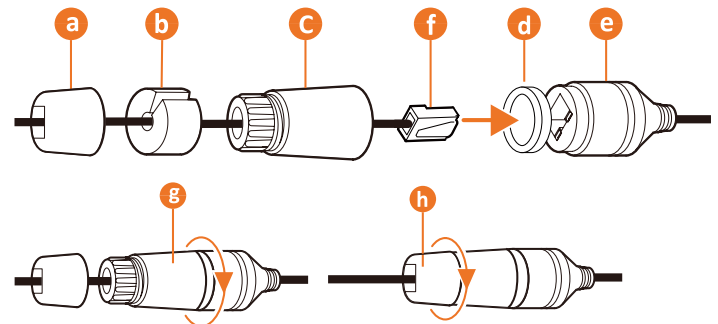


NOTE: Cables with $\varnothing 4.5\text{mm}$ to $\varnothing 5.5\text{mm}$ thickness should use the black rubber ring. Cables over $\varnothing 5.5\text{mm}$ in thickness should use the white rubber ring.

NOTE: To ensure moisture seal, make sure the o-ring **d** is in place between **c** and **e**. In extreme environments use of an outdoor rated sealer is recommended.

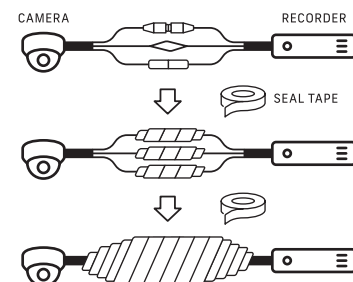


4 Adjust the camera's tilt, pan and rotation.

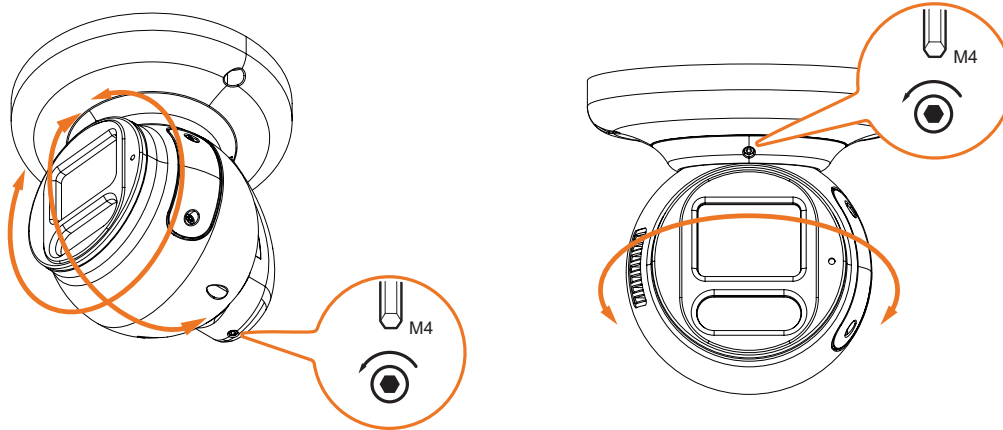


5 Cables and external devices.

DI (+)	WHITE
DI (-)	YELLOW
DO (-)	SKY BLUE
DO (+)	GRAY + DOT

NO	Activation	Activation
NC	Activation	Activation

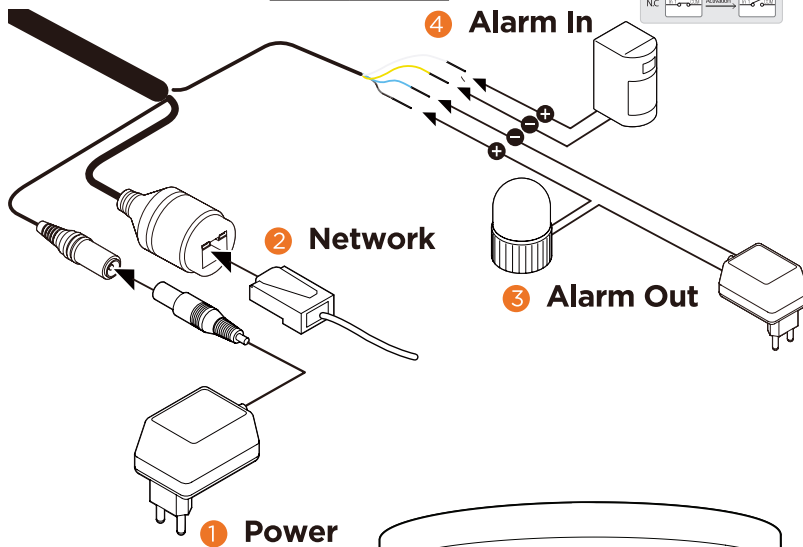

6 Remove the protective films and complete the installation.

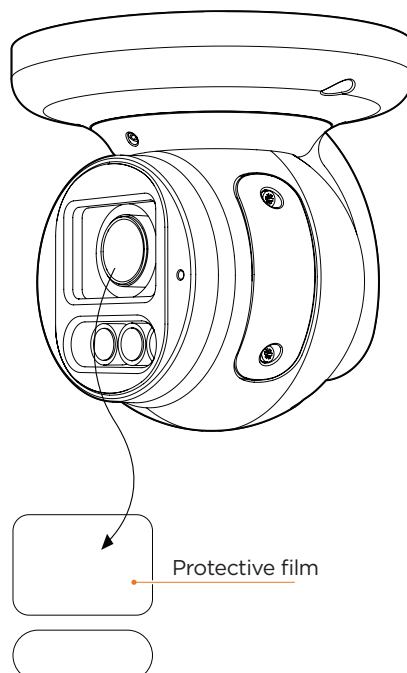

Download quick setup guide, manual, IP Finder and firmware here:

