

DWC-XSTD08MF - AI Plugin  
DWC-XSTD05MF - AI Plugin  
DWC-XSTD05MFQ - QR Code Plugin



**NOTE:** Download all your support materials and tools in one place.






**NOTE:** Please refer to the full product manual for instructions on setting up the web viewer, its functions, and camera settings options.



**NOTE:** This product is covered by one or more claims of the HEVC Patents listed at [patentlist.accessadvance.com](http://patentlist.accessadvance.com).




## BOX CONTENT




2x (4.0mm x 35mm)






- 1 Replace the moisture absorber in the camera's control panel.

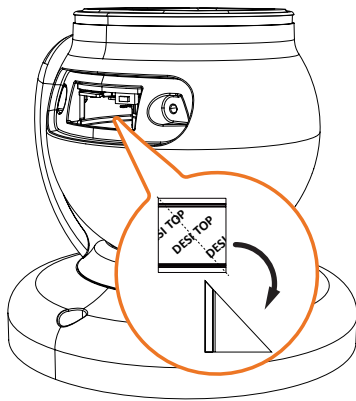

- 3 Pass wires through and secure the camera to the mounting surface. Use the cable guide for direct surface installation.

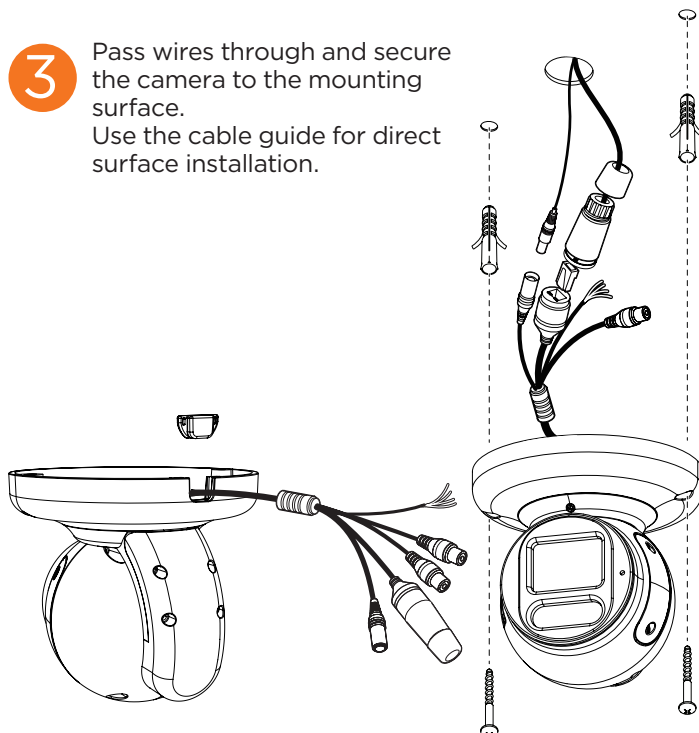


- 2 Mark and drill mounting holes in the mounting surface.

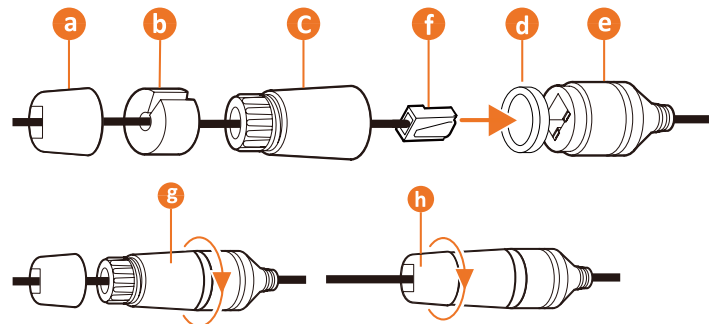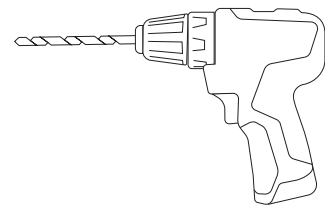
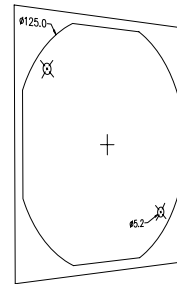


**NOTE:** Cables with  $\varnothing 4.5\text{mm}$  to  $\varnothing 5.5\text{mm}$  thickness should use the black rubber ring. Cables over  $\varnothing 5.5\text{mm}$  in thickness should use the white rubber ring.


**NOTE:** To ensure moisture seal, make sure the o-ring **d** is in place between **c** and **e**. In extreme environments use of an outdoor rated sealer is recommended.

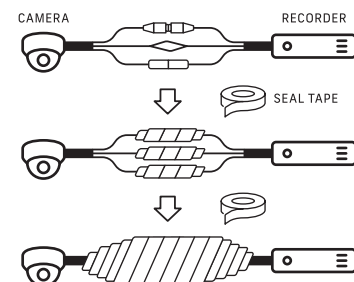



#### 4 Adjust the camera's tilt, pan and rotation.

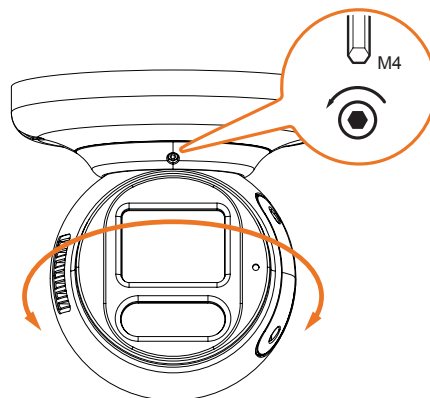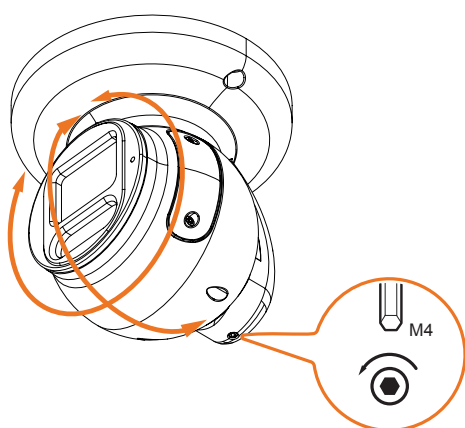


#### 5 Cables and external devices.

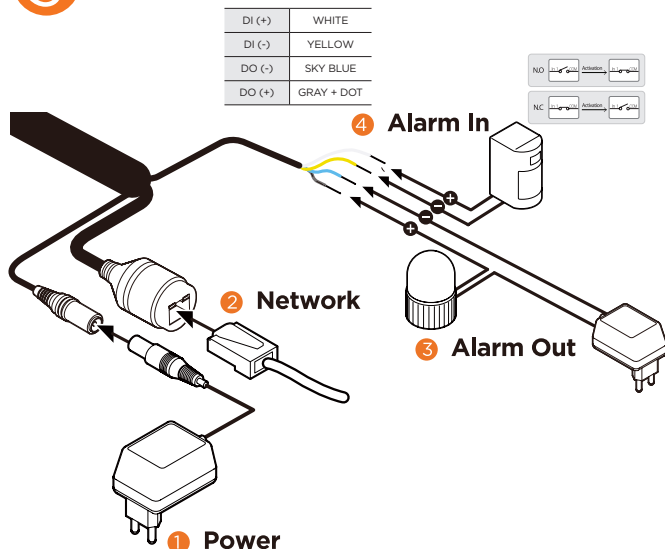

#### 6 SD card (optional) and reset button.

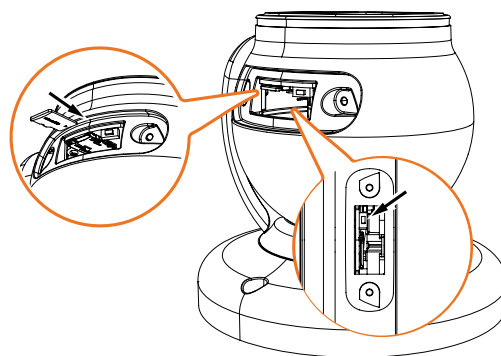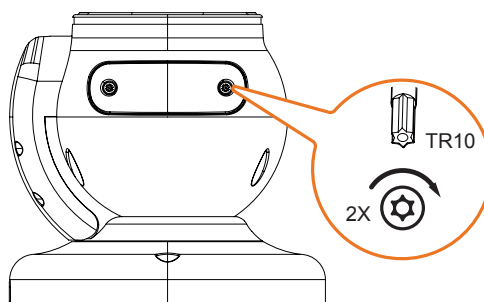

#### 7 Remove the protective films and complete the installation.

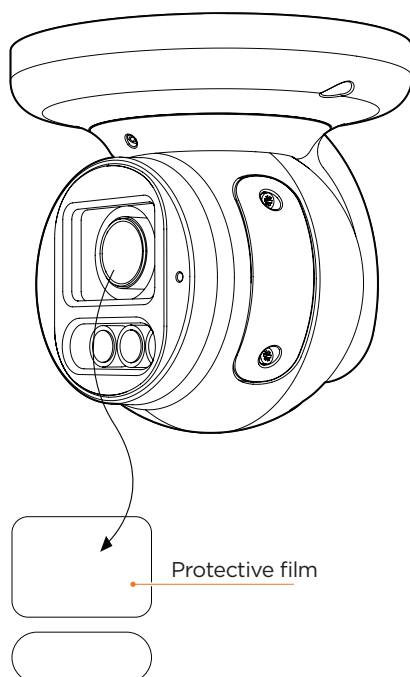

Download quick setup guide, manual, IP Finder and firmware here:

