






2-port Gigabit Waterproof PoE Splitter

DW-POEEX90W



WHAT'S IN THE BOX

PoE Splitter		1	Wrench (27mm)		1
Waterproof Cap and Rubber Ring		3	Mounting Screws (M4x30mm)		4
User Installation Guide		3	Ground cable		1


NOTE: Download all your support materials and tools in one place

1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the 'Search by Product' search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click 'Search'. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.




Hardware Description

	LED	Color	Function
1	PoE In	Green	On: Link normal Off: Link blocked Flashing: Data transmitting
2	PoE Out 1, 2	Green	On: Link normal Off: Link blocked Flashing: Data transmitting

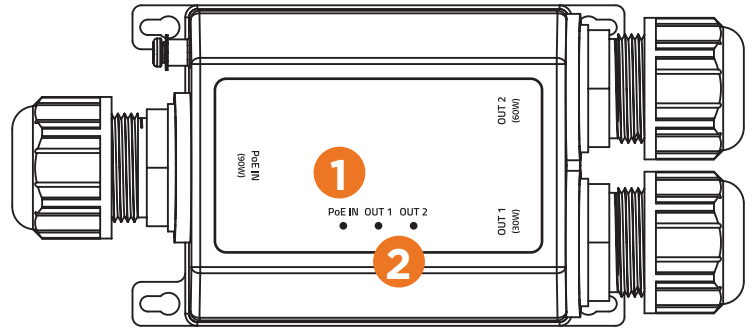

Installation

- 1 Use the PoE Splitter to mark and drill the necessary holes on the mounting surface.
- 2 Use the mounting screws and anchors to secure the PoE Splitter to the mounting surface.
- 3 Pass the network cables through the waterproof cap before connecting the Ethernet cable to the Splitter (see diagram below).

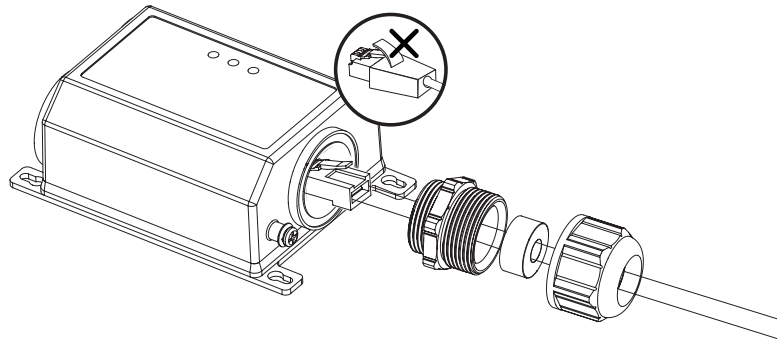

- 4 Use the wrench included with the PoE Splitter to secure the base of the waterproof cap to the Splitter first, then tighten the top of the cap to secure it around the network cable.
- 5 Connect a PoE switch to the PoE Splitter's input port. The PoE Splitter can support up to 90W input.
- 6 Connect a camera, speaker, illuminator or motion detector to the PoE Splitter's output ports in accordance to the Splitter's power output specifications (port #1= <30W, port #2= 60W).

NOTE: The maximum distance supported with the PoE Splitter is 328ft (100m) between the PoE switch and the Splitter, and 328ft (100m) between the Splitter and the IP camera, for a total of up to a 656ft (200m) distance.

