


Hanging mount bracket for multi-sensor vandal dome cameras

DWC-MDSHM



WHAT'S IN THE BOX

Camera Mounting Screws		2	Quick Setup Guide		1
Safety Wire		1			




NOTE: Download all your support materials and tools in one place.

1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the '**Search by Product**' search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click '**Search**'. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.




INSTALLATION

- 1 Secure the hanging mount to the pole (NTP ¾ thread). The pole is not included and must be purchased separately.
- 2 Before attaching the camera to the hanging mount, remove the dome from the camera base.
- 3 Affix the safety wire at the bottom of the hanging mount. Connect the other side of the safety wire to the base of the camera.
- 4 To mount the camera to the mounting accessory, remove the dome from the camera base using the wrench included with the camera.
- 5 Pass wires through and make all necessary connections.
- 6 Use the camera mounting screws (included with bracket) to secure the camera to the mount cap. Align the indented lines on the side of the camera with the lines on the hanging mount. Rotate the camera clockwise to lock into position.

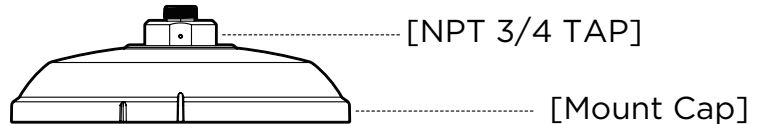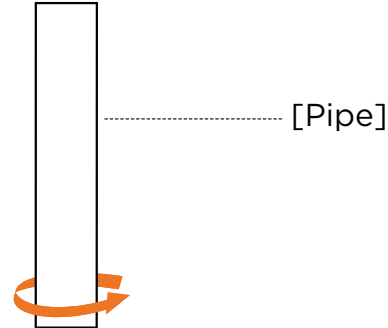

UNLOCK



LOCK

- 7 Adjust the camera lens module's position and secure the dome cover to the camera. See the camera's QSG for camera setup information.

NOTE: Do not touch the lenses when handling the camera modules.